

Series HIA : Hydraulic Quick Couplings



www.dwb.com.tw


■ ISO 7241-1A standard

■ Double valves

■ Low spill

■ Low interference

■ Zinc-plated steel

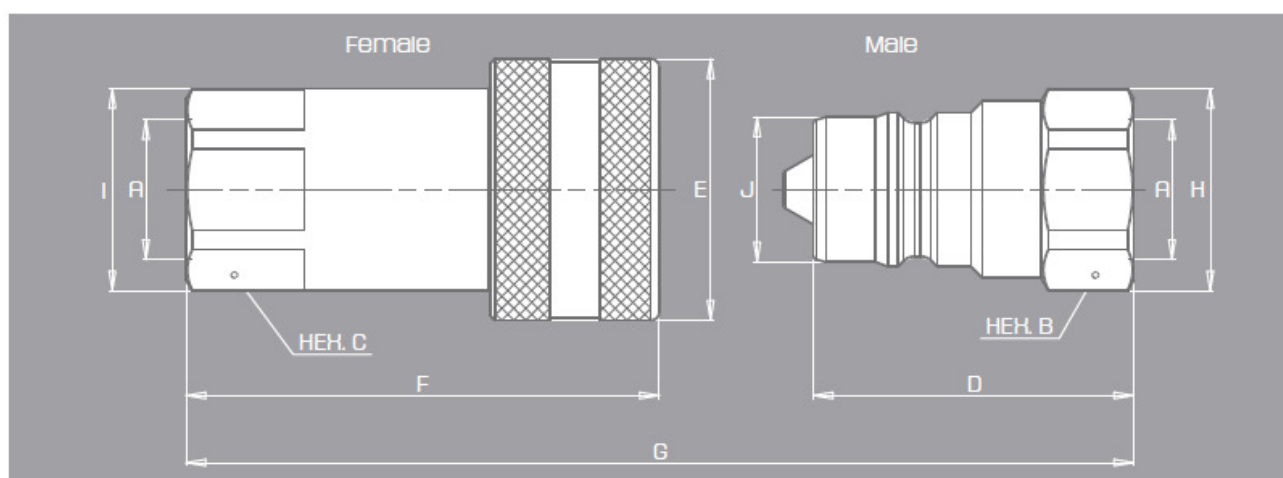

body size	Socket	Plug	Thread	bar	Flow	G (mm)	F (mm)	D (mm)	E (mm)	HEH. C (mm)	HEH. B (mm)
1/4"	HIA14SGF	HIA14PGF	G1/4" female	250	12 l/min	70	49	35	26	19	19
3/8"	HIA38SGF	HIA38PGF	G3/8" female	250	23 l/min	85	60	42	30	22	22
1/2"	HIA12SGF	HIA12PGF	G1/2" female	200	45 l/min	92	68	46	38	27	27
3/4"	HIA34SGF	HIA34PGF	G3/4" female	200	74 l/min	115	85	57	45	34	34
1"	HIA1SGF	HIA1PGF	G1" female	200	100 l/min	131	99	65	52	41	41